


SPECS
 WAVEGUIDE SIZE: WR90
 FREQUENCY: 8.2 – 12.4 GHZ
 VSWR: 1.25:1
 CONNECTOR: SMA F OR M
 MATERIAL: 6061 ALUMINUM
 FINISH: BLUE ANODIZE

Type	Order Code
WR90 WG to coax adapter (F)	AST1061-70-F (UGG FLANGE, FEMALE CONNECTOR)
WR90 WG to coax adapter (M)	AST1061-7G-M (CPRG FLANGE, MALE CONNECTOR)

FLANGE CODES: UGG=O, COVER=F, CPRF=R, CPRG=G, CHOKE=K

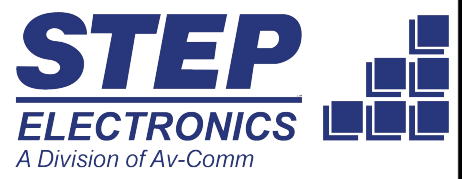

REVISIONS		APPROVALS			
SYM	DESCRIPTION	DATE	ENGRG	PROD	Q.A.

PROPRIETARY INFORMATION
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH SHALL NOT BE REPRODUCED, TRANSFERRED TO OTHER DOCUMENTS, DISCLOSED TO OTHERS, USED FOR MANUFACTURING OR ANY OTHER PURPOSE WITHOUT PRIOR WRITTEN PERMISSION FROM AST.

BREAK ALL CORNERS AND SHARP EDGES					
UNLESS OTHERWISE SPECIFIED	FRACTIONAL ± 1/32	DRAWN	DRAWN	DRAWN	DRAWN
	DECIMAL .XXX ± .010				
	ANGULAR .XX ± .020				
MATERIAL: NOTED					
SPEC:					
FINISH: NOTED					
SPEC:					
WR90 WAVEGUIDE TO COAXIAL ADAPTER (SMA)			DRAWING # AST1061-7		
SCALE NTS			SHEET 1 OF 1		